


## ACCESS 2USB Wi-Fi Setup for 4.0 firmware and newer


1. Insert a supported USB Wi-Fi adapter (such as a Edimax EW-7811UAC).
2. Go to **Network->Manage Networks** and select the appropriate WLAN Adapter entry. *(If you do not see an appropriate icon, please contact our tech support department for assistance techies@comrex.com)*
5. You can now select your desired hotspot and press the **Create Location** button.



3. If the entry displays a red X over the icon, press the **Enable** button on the right-hand side of the screen
4. Press the **Configure** button on the right-hand side of the screen. Select the **Scan** tab and press the **Scan** button near the bottom of the screen. This action will take a few moments to populate a list of the local hotspots.

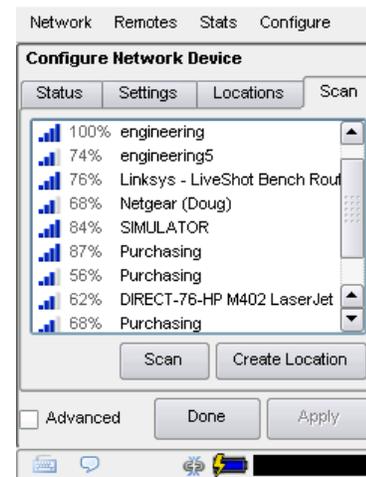

6. You will now be directed to the **Locations** tab.

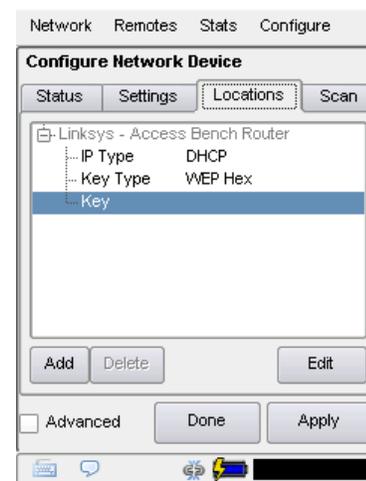

7. If the connection requires a password, select the **Key** parameter and press the **Edit** button near the bottom of the screen.
8. Press the keyboard icon in the lower left-hand corner of the screen to display the virtual keyboard. Enter in the password and press the keyboard button again. Press **Save**.



9. Select the **Settings** tab and verify that the **Active Network Location** is pointing towards the intended hotspot name, (or **Automatic**). If it is not, select the **Active Network Location** parameter and press the **Edit** button. Press the drop down list and select the appropriate name. Press **Save**.



10. Press **Apply**.
11. You will be brought back to the main network screen and the adapter will negotiate with the hotspot to acquire a current IP address. This may take a few moments.
12. Once an IP address displays near the bottom of the screen, you can then navigate to **Remotes->Manage Connections** to initiate a connection.